



SERVICOM

PACIFIC

Specialists in printing technology

THE INVINCIBLE 574 - SP410

Manufactured by **Printec** and converted by Servicom Pacific

Application

- Suitable for both UV curing and oxidation drying systems
- Recommended For: All sheetfed printing applications especially where UV inks are used.

This compressible blanket performs on all grades of paper and board transferring dense solids and crisp sharp halftone dots. It is also precision buffed to transfer ink and release at high press speeds.


Technical Data

Colour	Blue
Description	A buffed compressible quick release printing blanket
Surface	Textured Buffed Face
Thickness	4 ply 1.95 Standard +/- .020mm (.0767" standard +/- .001")
Elongation (1000N / 50mm)	< 1.25% max 80% typical
Compressibility	0.0125 inches @ 300 psi.
Tensile Strength	60 N/mm
Hardness	Surface: 68 Shore A, Overall: 78 Shore A.



Features & Benefit

- High quality half tones and even, mottle free solids together with reduced make ready times and easier washing result from the textured micro-ground surface.
- Excellent ink and paper release are a feature of the textured surface layer, making this blanket ideally suited for a wide variety of papers and carton boards.
- Major smashes are absorbed by the thick uniform syntactic compressible layer.
- Suitable for use with a wide variety of inks, both UV curing and oxidation drying systems, due to special blend of nitrile and polysulphide polymers compounded into the surface layer. Ideally suited for carton printing and metal dec where both ink systems are frequently used on the same press.
- Excellent on press stability due to all cotton warp fabrics which minimise gauge loss and "bedding-in" on the press.

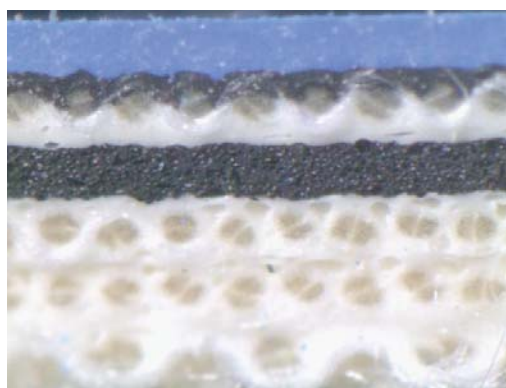

Head Office - NSW: Phone: +61 (0)2 9894 5466 Fax: +61 (0)2 9894 5823
QLD: Phone: +61 (0)4 0070 8202 Fax: +61 (0) 7 5519 9655 VIC: Phone: +61 (0)4 3940 0858 Fax: +61 (0)3 9467 8848
New Zealand: Phone: +64 (0)9 533 4492 Fax: +64 (0)9 533 4491 Web: www.servicomnz.co.nz

www.servicompacific.com.au